


APENDIX A: BODY SPECIFICATIONS




2010 USMTS MODIFIED BODY SPECIFICATIONS

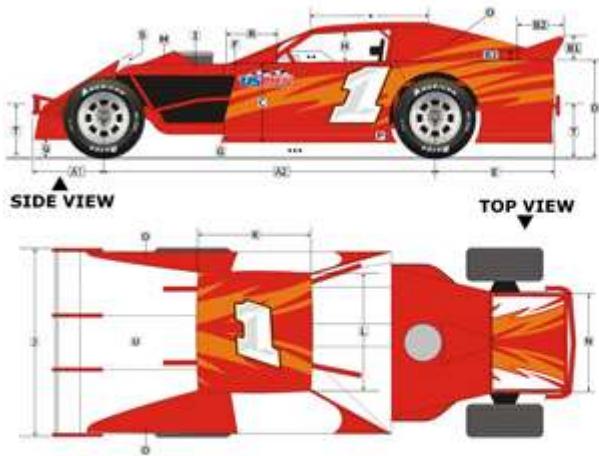

- A1. Maximum 42".
- A2. Minimum 108".
- B1. Maximum 3" or 4" (see Engine Rules).
- B2. Maximum 20" long, Maximum 2" above and 2" behind spoiler (maximum 2 center and 2 side).
- B3. Maximum 3" tall from deck lid to end of angle. No square or rectangular supports.
- C. Minimum 22"; Maximum 30".
- D. Maximum 38".
- E. Minimum 34"; Maximum 48".
- F. Top of door and deck to rear of block.
- G. Maximum 6" forward from rear of block.
- H. Minimum 12"; Maximum 18".
- I. Maximum 4" sides; Maximum 3" slope.
- J. Minimum 53"; Maximum 66" (must be same front).
- K. Minimum 40"; Maximum 56".
- L. Minimum 44"; Maximum 50".
- M. Maximum 6" high.
- N. Maximum 40" (must be inside bumper braces).
- O. Sail panels must be same on both sides.
- P. Maximum 8" plastic skirt.
- Q. Maximum 7".
- R. Maximum 20".
- S. Maxcure 2", bent same (both in and out) and flush with hood.
- T. Minimum 16" and maximum 20" from ground.
- U. Deck must remain flat from side to side, except for cockpit (maximum 10" rake from front to rear); if doors remain flat, only maximum 5" rake permitted.
- * Maximum 5" front clearance and 2" rear clearance using 4' level.
- ** Driver may be asked to exit right side of car with helmet on if Official deems interior shield to be too large or obstructive unless.
- *** Minimum 3" from ground to body; Minimum 4" from ground to frame.

Spoiler Braces



- A: 12" Maximum.
 - B: 13" Minimum.
 - C: 3" Maximum.
 - D: 20" Maximum.
 - E: 5" or 8" Maximum (see Engine Rules).
- All spoiler supports must be of the same shape with a maximum of four supports. No mixing of the two outside supports. Metal braces in center are permitted. Spoiler must mount to deck. Supports may extend a maximum 2" above and maximum 2" behind spoiler.

Spoilers: If utilizing a Flat Tappet/Over Head Engine (see Rule 16.11), Brake Aluminum Spec Head Engine (see Rule 16.16) or any engine with steel heads and a 23-degree valve angle, the maximum rear spoiler height shall be six (6) inches. If utilizing aluminum or raised runner heads other than the Scarle Aluminum Spec Heads, the maximum rear spoiler height shall be five (5) inches.

Copyright © 2009-2010 United States Modified Touring Series. All rights reserved.

[Click here](#) to download a high-resolution image of the Body Specifications diagram.

AMENDMENTS

##

For clarifications or questions, call MAMS Series Director Ernie Leftwich at (417) 684-3608 or email tech@midamericamodifieds.com.

Mid America Modified Series (MAMS)

P.O. Box 683

Bolivar, MO 65613

Tel: 417-399-5756

Fax: 417-777-6034

www.midamericamodifieds.com

Copyright © 2009-2010 Mid America Modified Series. All rights reserved.